

libero



*mia***MODA**
MY LIFE • MY WAY • MY STYLE

Please read this owner's manual carefully and keep it in a safe place.

Owner's
Manual

Mia Moda Model No: 1300

Dear Customer,

Congratulations on the purchase of your Mia Moda Stroller. We are pleased that you have chosen one of our products and hope that you will be completely satisfied with the service you receive from the product. We advise you to read the Instruction Leaflet carefully before use of the stroller and then to keep it in a safe place. If you fail to do this the safety of your child can be jeopardized. Kindly pay attention to the washing and care instructions so that you enjoy long and trouble free use of your new purchase.

Your Mia Moda team

Hints for care and use

1. Each product frame is manufactured according to ASTM-F833 standards. To maintain the safety of your product, the moving components must be lubricated regularly and if required rivetted.

Note: Use only silicon-oil or silicon-spray for oiling.



2. Regular care and maintenance contribute to the safety and longevity of your product. Environmental influences such as salty air, road strewn salt or acid rain as well as outdoor storage contribute towards corrosion. Therefore always store your stroller indoors.

3. We recommend regular maintenance of all varnished components. Should the frame and varnished components become soiled use a damp cloth moistened with water diluted mild detergent to wipe away the dirt.

PREPARATION FOR USE

Attaching the back wheels

- 1 Place the chassis on a flat surface with the rear of the backrest facing upwards.
- 2 Slide the wheel joints over the ends of the back legs of the chassis. Make sure that the hooked clip in the centre of the axle is pointing downwards and towards the chassis. Click each wheel into place.
- 3 Press the clip on the axle onto the hook on the back of the chassis until it clicks into place. Pull gently on each wheel to make sure it is secure.

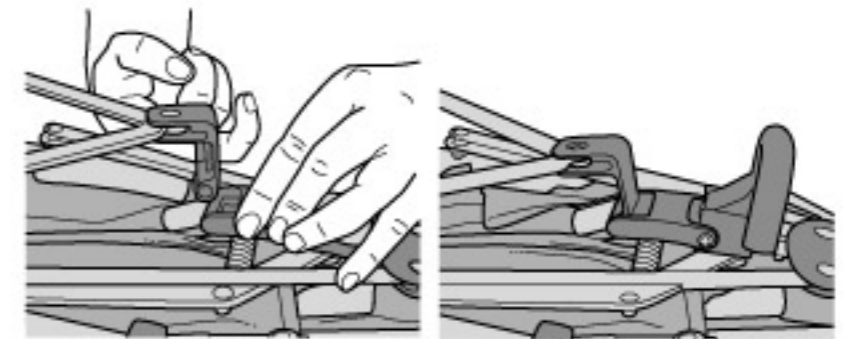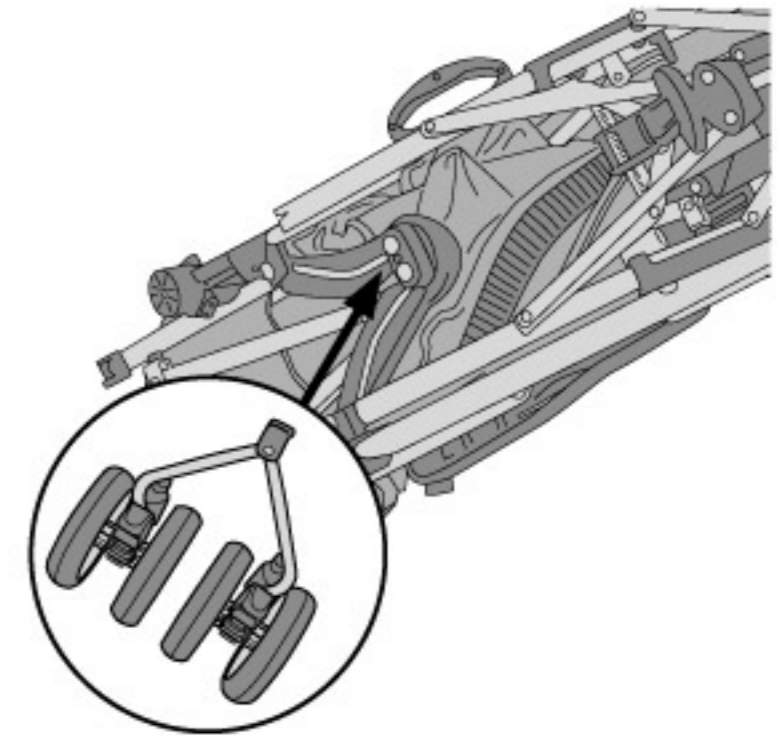

Attaching the front wheels

- 1 Insert the rod on each wheel into the wheel joints of the front legs.
- 2 Push firmly until each wheel clicks into place.
- 3 Pull gently on each wheel to ensure it is secure.

